


Control Cable 16AWG 2C Riser (CMR) Shielded Stranded

Cable Detail

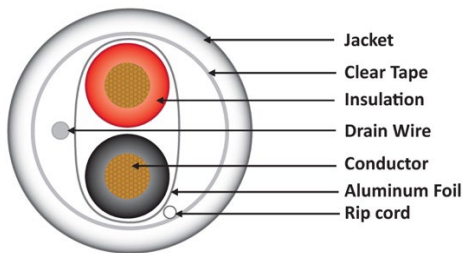

Cable Marking

16 AWG 2C SHIELDED CMR FT4 TYPE XXXXXXXX C(ETL)US
****FT

Part Numbers	Jacket Color	Package
CC1602SRGY4	Grey	1000ft / Reelex II

Approval



Applicable Standards

- Power-limited control circuits
- Wiring of the following systems: Security / Audio / Background music
- Reference Standard: CM/CMR CL2/CL2R

Physical Characteristics

Conductor Material		Stranded Bare Copper
AWG		16AWG
Conductor	(mm)	7 / 0.16
Stranding		Stranded
Insulation Material		PVC
Average Thickness	(mm)	0.303
Insulation Dia.	(±0.03mm)	2.1
Number of Conductor		2
Lay Length		Parallel / Twist
Shielded		PET + AL foil
DRAIN WIRE		7 x 0.20 (mm)
Jacket Material		FR-PVC
Average Thickness	(mm)	0.406
Overall Cable Dia.	(mm)	4.50
Insulation colors		Black / Red
Nominal Weight	1000 ft.	29 lbs.