



Cable ID: CAT6A SDJ SERIES U/UTP CABLING SYSTEM CL



Test Summary: PASS

Date / Time: 10/14/2021 04:31:20 PM
Headroom 7.6 dB (NEXT 36-45) Test
 Limit: TIA Cat 6A Channel Cable
 Type: Cat 6A U/UTP
 NVP: 68.2%

Operator: Sam Hen
 Software Version: V6.6 Build 2
 Limits Version: V7.6
 Calibration Date:
 Main (Module): 09/30/2021
 Remote (Module): 09/30/2021

Model: DSX-5000
 Main S/N: 3658026
 Remote S/N: 3658040
 Main Adapter: DSX-CHA004
 Remote Adapter: DSX-CHA004

Length (ft), Limit 328	[Pair 12]	311
Prop. Delay (ns), Limit 555	[Pair 36]	491
Delay Skew (ns), Limit 50	[Pair 36]	28
Resistance (ohms)	[Pair 36]	13.54
Insertion Loss Margin (dB)	[Pair 45]	5.3
Frequency (MHz)	[Pair 45]	500.0
Limit (dB)	[Pair 45]	49.3

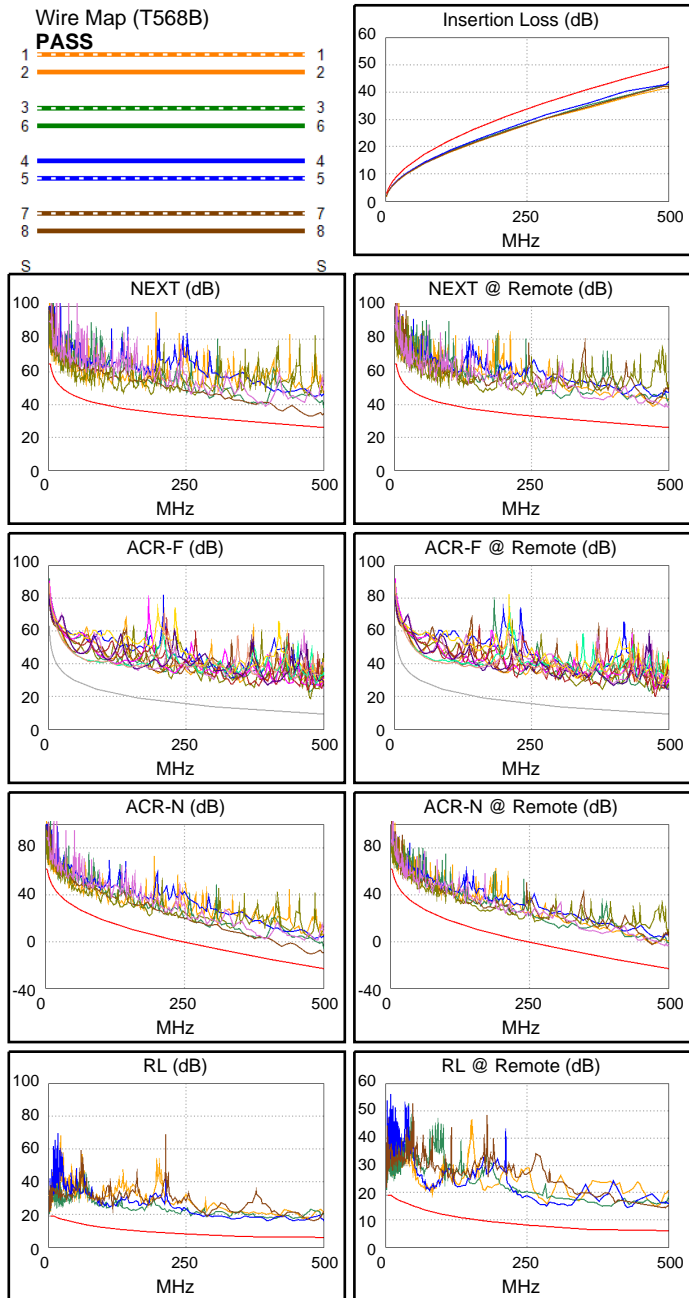

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45	12-36	36-45	45-78
NEXT (dB)	7.6	9.7	7.6	12.4
Freq. (MHz)	477.0	6.4	477.0	500.0
Limit (dB)	26.7	59.8	26.7	26.1
Worst Pair	45	36	45	36
PS NEXT (dB)	8.1	9.2	8.1	12.8
Freq. (MHz)	477.0	6.3	477.0	471.0
Limit (dB)	23.8	57.4	23.8	23.9

PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45	45-36	36-45	45-36
ACR-F (dB)	9.0	10.4	9.0	10.4
Freq. (MHz)	476.0	476.0	476.0	476.0
Limit (dB)	9.7	9.7	9.7	9.7
Worst Pair	45	36	45	36
PS ACR-F (dB)	10.0	12.9	10.0	12.9
Freq. (MHz)	476.0	476.0	476.0	476.0
Limit (dB)	6.7	6.7	6.7	6.7

N/A	MAIN	SR	MAIN	SR
Worst Pair	36-45	12-36	36-45	45-78
ACR-N (dB)	10.7	10.8	10.7	18.7
Freq. (MHz)	477.0	6.4	477.0	489.0
Limit (dB)	-21.4	54.6	-21.4	-22.3
Worst Pair	36	36	45	45
PS ACR-N (dB)	11.6	10.4	15.0	19.0
Freq. (MHz)	6.3	6.3	500.0	500.0
Limit (dB)	52.2	52.2	-26.1	-26.1

PASS	MAIN	SR	MAIN	SR
Worst Pair	12	12	45	78
RL (dB)	6.5	6.5	9.7	7.6
Freq. (MHz)	3.6	82.3	401.0	481.0
Limit (dB)	19.0	12.8	6.0	6.0

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T 10GBASE-T ATM-25
 ATM-51 ATM-155 100VG-AnyLan
 TR-4 TR-16 Active TR-16 Passive