
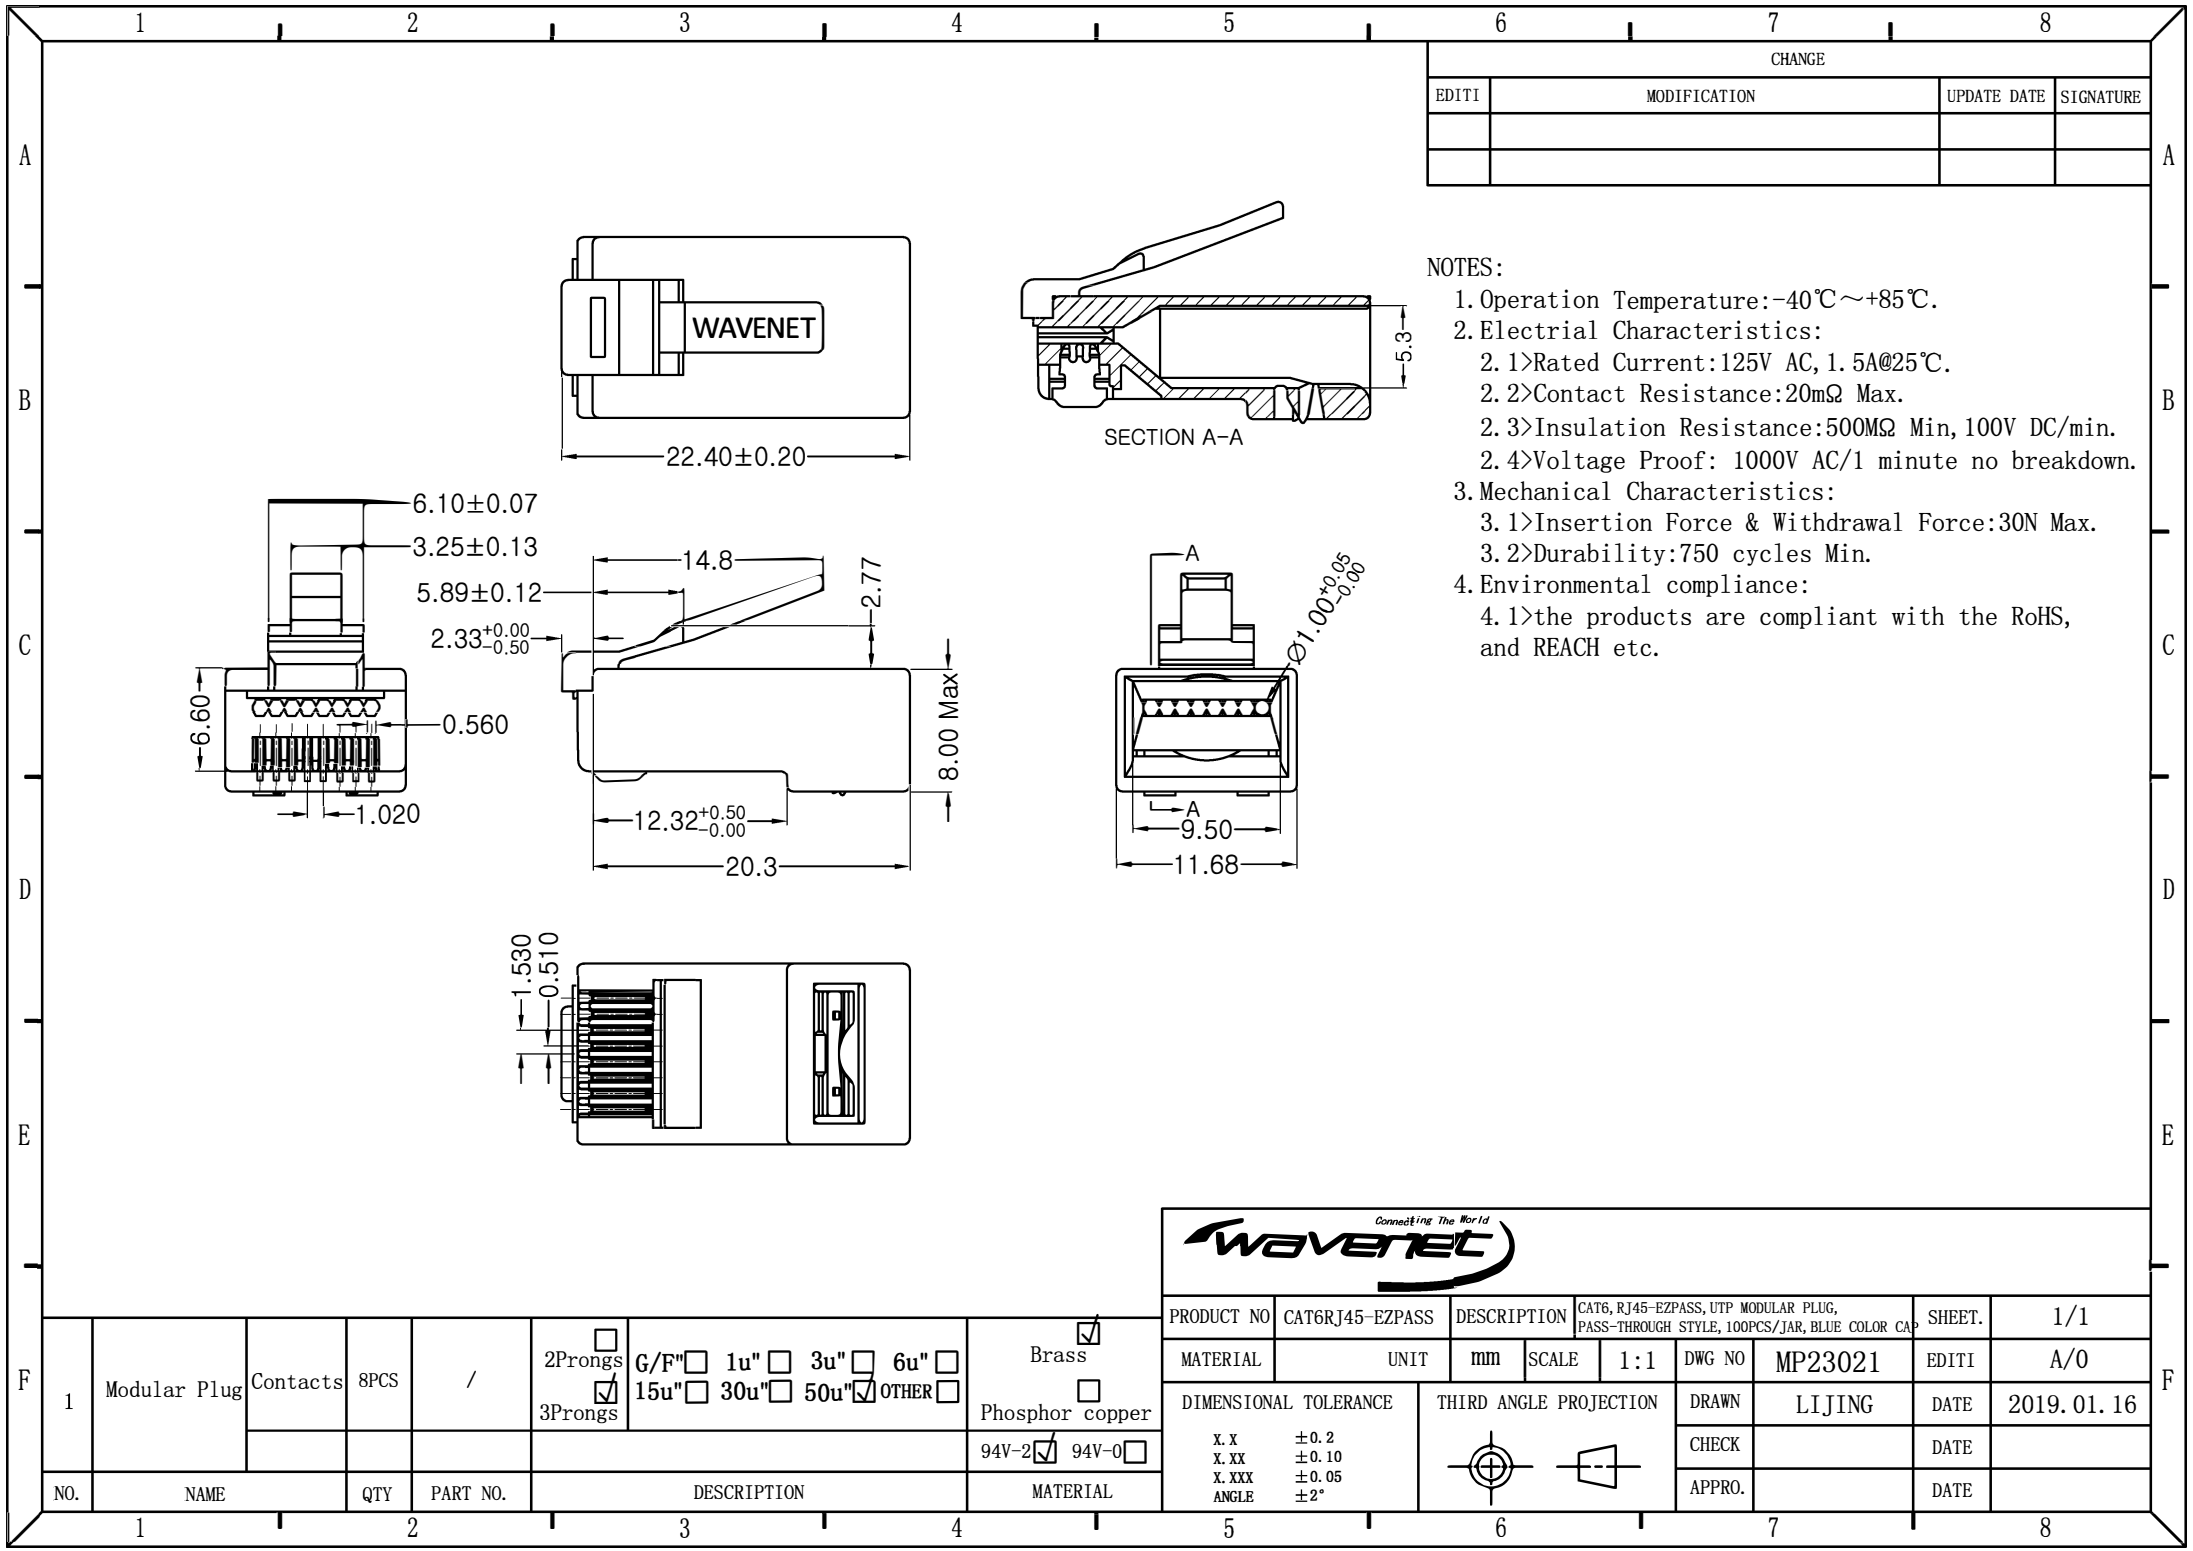




CHANGE			
EDITI	MODIFICATION	UPDATE DATE	SIGNATURE

- NOTES:
1. Operation Temperature:-40℃~+85℃.
 2. Electrical Characteristics:
 - 2.1>Rated Current:125V AC,1.5A@25℃.
 - 2.2>Contact Resistance:20mΩ Max.
 - 2.3>Insulation Resistance:500MΩ Min,100V DC/min.
 - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown.
 3. Mechanical Characteristics:
 - 3.1>Insertion Force & Withdrawal Force:30N Max.
 - 3.2>Durability:750 cycles Min.
 4. Environmental compliance:
 - 4.1>the products are compliant with the RoHS, and REACH etc.

F	1	Modular Plug	Contacts	8PCS	/	☐ 2Prongs ☒ 3Prongs	G/F"☐ 1u"☐ 3u"☐ 6u"☐ 15u"☐ 30u"☐ 50u"☒ OTHER☐	☒ Brass ☐ Phosphor copper
							94V-2☒ 94V-0☐	
	NO.	NAME		QTY	PART NO.	DESCRIPTION		MATERIAL
	1			2		3		4

 Connecting The World								
PRODUCT NO	CAT6RJ45-EZPASS	DESCRIPTION	CAT6, RJ45-EZPASS, UTP MODULAR PLUG, PASS-THROUGH STYLE, 100PCS/JAR, BLUE COLOR CAP				SHEET.	1/1
MATERIAL	UNIT	mm	SCALE	1 : 1	DWG NO	MP23021	EDITI	A/0
DIMENSIONAL TOLERANCE		THIRD ANGLE PROJECTION			DRAWN	LIJING	DATE	2019.01.16
X. X ±0.2					CHECK		DATE	
X. XX ±0.10					APPRO.		DATE	
X. XXX ±0.05								
ANGLE ±2°							DATE	
5		6			7		8	