

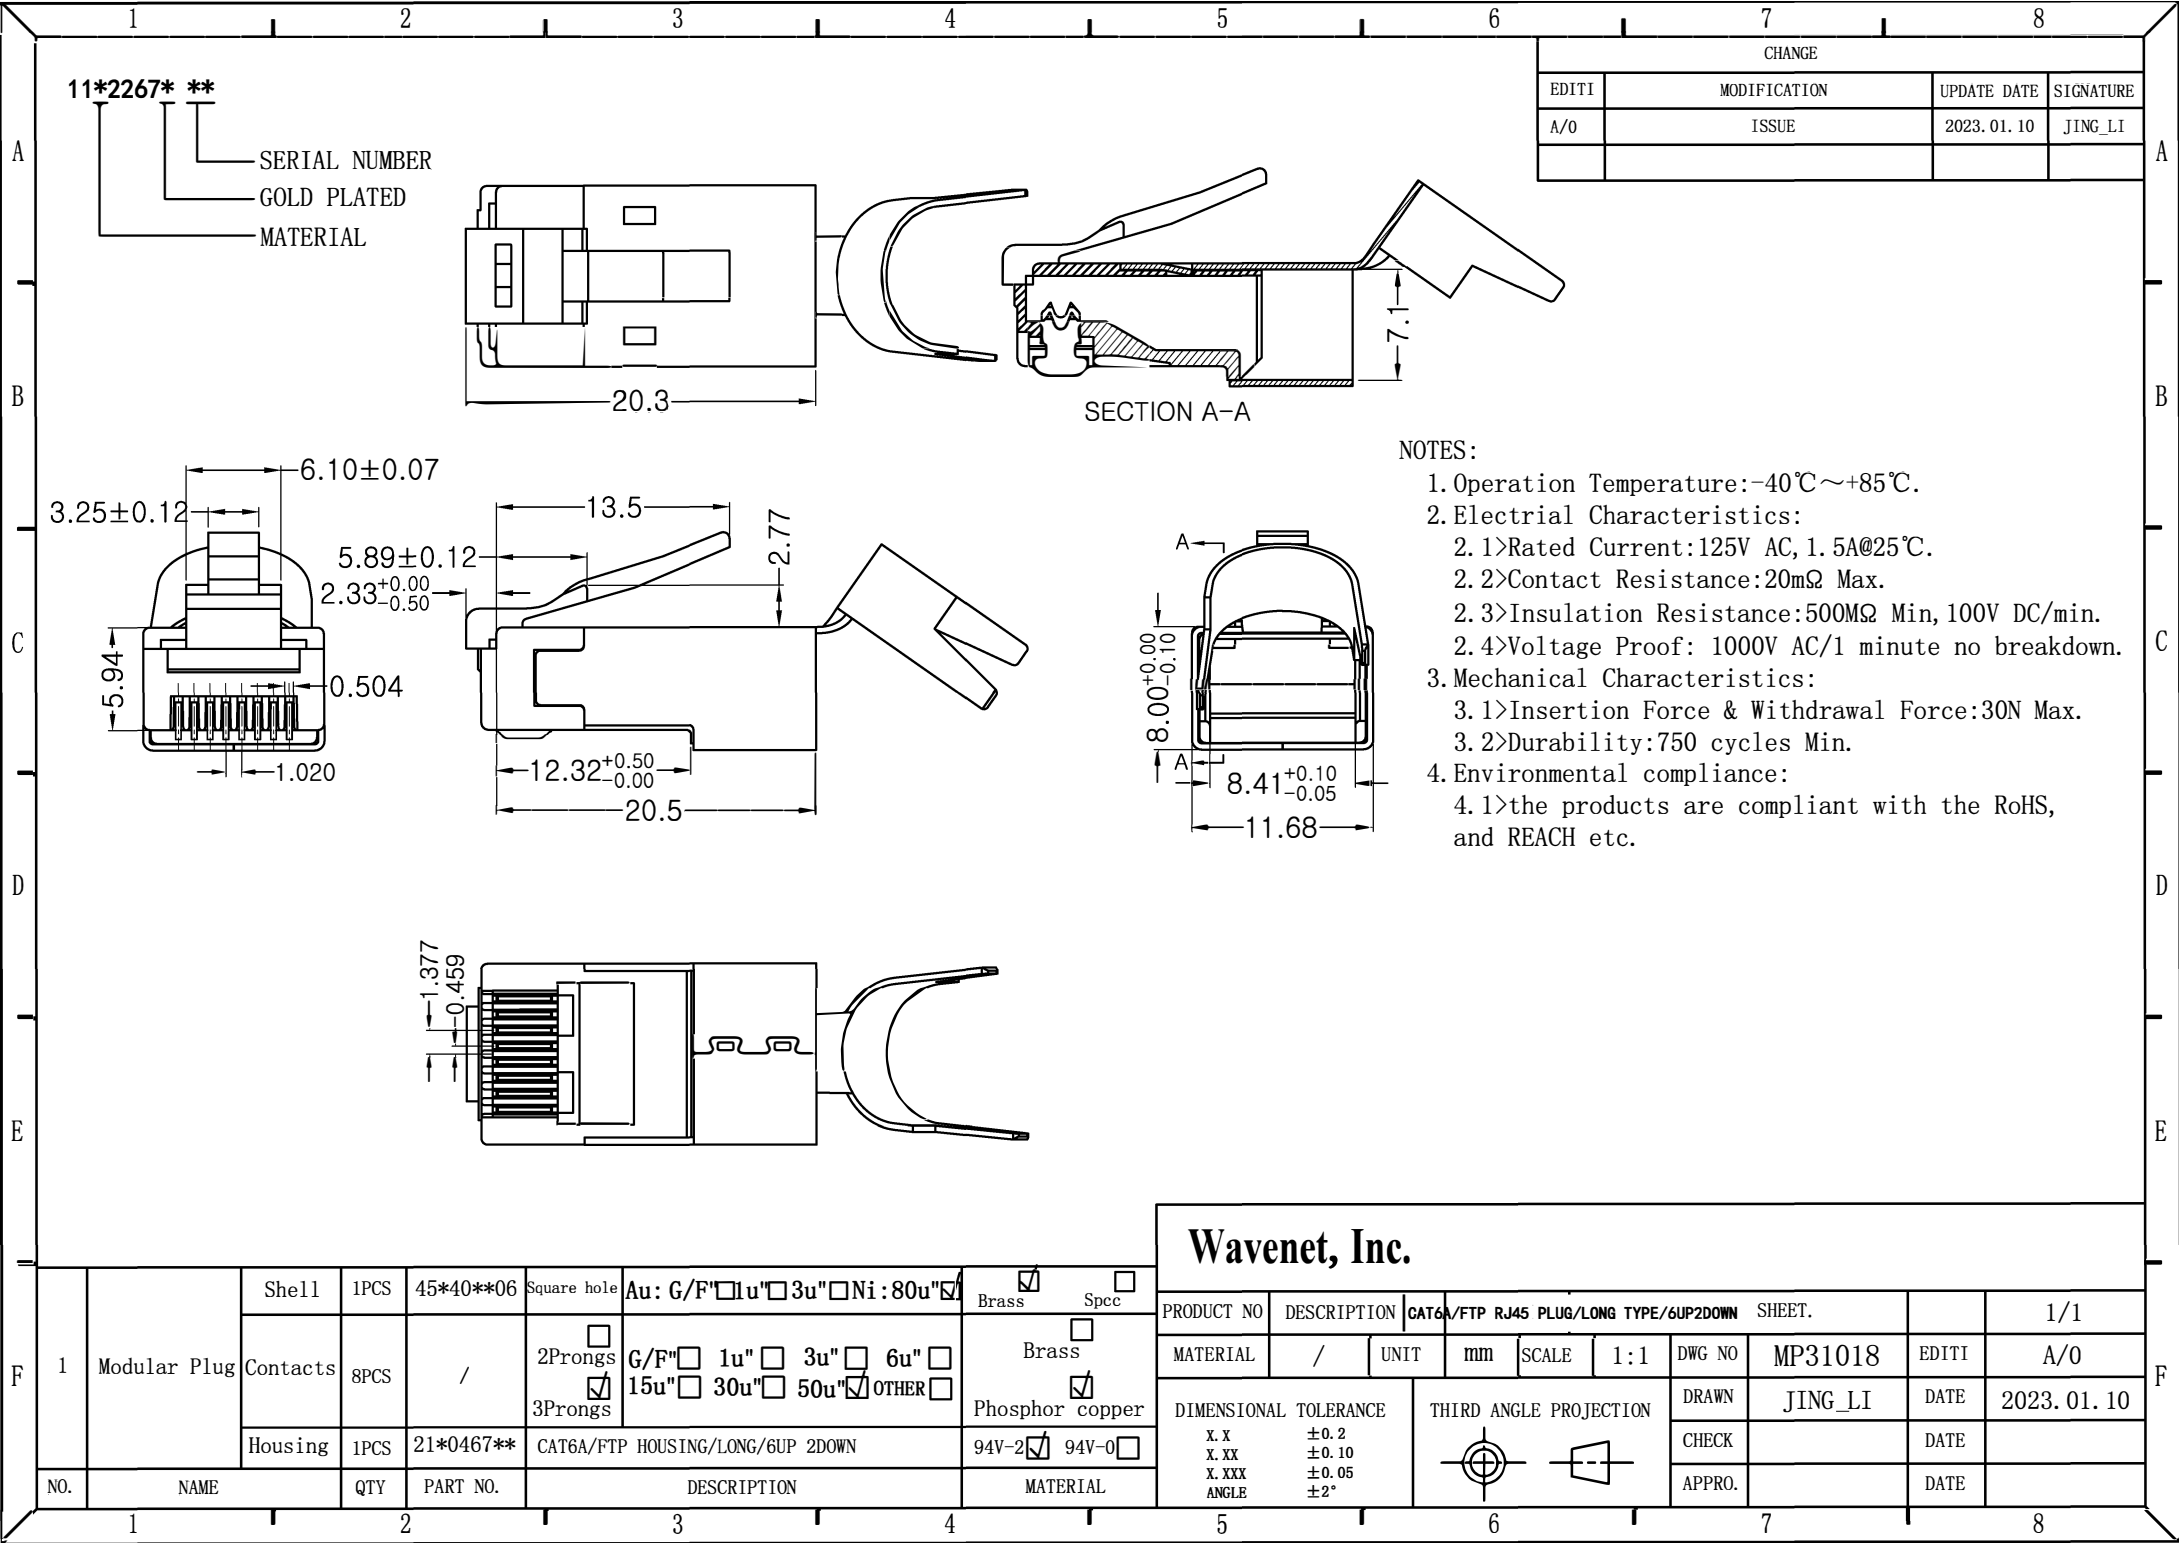




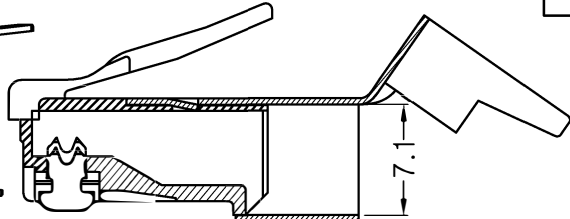


11*2267* **

SERIAL NUMBER
GOLD PLATED
MATERIAL

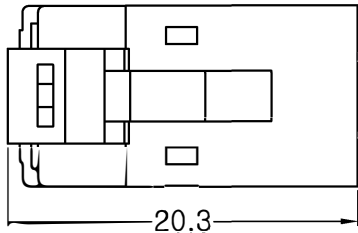


SECTION A-A

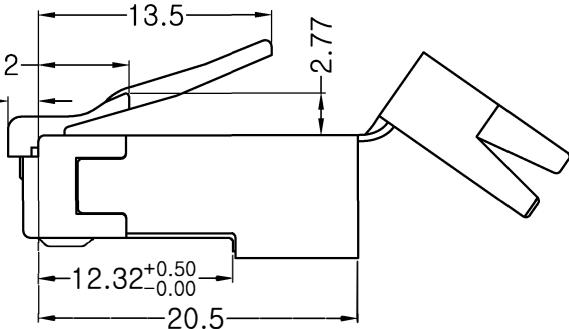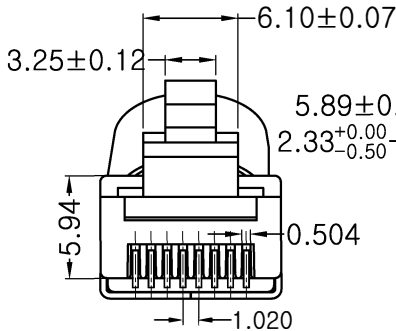


NOTES:

- 1. Operation Temperature: -40℃~+85℃.
- 2. Electrical Characteristics:
 - 2.1>Rated Current: 125V AC, 1.5A@25℃.
 - 2.2>Contact Resistance: 20mΩ Max.
 - 2.3>Insulation Resistance: 500MΩ Min, 100V DC/min.
 - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown.
- 3. Mechanical Characteristics:
 - 3.1>Insertion Force & Withdrawal Force: 30N Max.
 - 3.2>Durability: 750 cycles Min.
- 4. Environmental compliance:
 - 4.1>the products are compliant with the RoHS, and REACH etc.




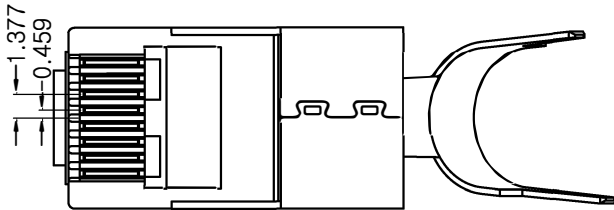


F	1	Modular Plug	Shell	1PCS	45*40**06	Square hole	Au: G/F" ☐ 1u" ☐ 3u" ☐ Ni: 80u" ☒	☒ Brass	☐ Spcc
			Contacts	8PCS	/	2Prongs ☐ 3Prongs ☒	G/F" ☐ 1u" ☐ 3u" ☐ 6u" ☐ 15u" ☐ 30u" ☐ 50u" ☒ OTHER ☐	☐ Brass ☒ Phosphor copper	
			Housing	1PCS	21*0467**	CAT6A/FTP HOUSING/LONG/6UP 2DOWN		94V-2 ☒ 94V-0 ☐	
	NO.	NAME		QTY	PART NO.	DESCRIPTION		MATERIAL	

Wavenet, Inc.									
PRODUCT NO	DESCRIPTION	CAT6A/FTP RJ45 PLUG/LONG TYPE/6UP2DOWN	SHEET.					1/1	
MATERIAL	/	UNIT	mm	SCALE	1:1	DWG NO	MP31018	EDITI	A/0
DIMENSIONAL TOLERANCE X. X ±0.2 X. XX ±0.10 X. XXX ±0.05 ANGLE ±2°		THIRD ANGLE PROJECTION 				DRAWN	JING_LI	DATE	2023. 01. 10
						CHECK		DATE	
						APPRO.		DATE	


30*0462**

SERIAL NUMBER
MATERIAL

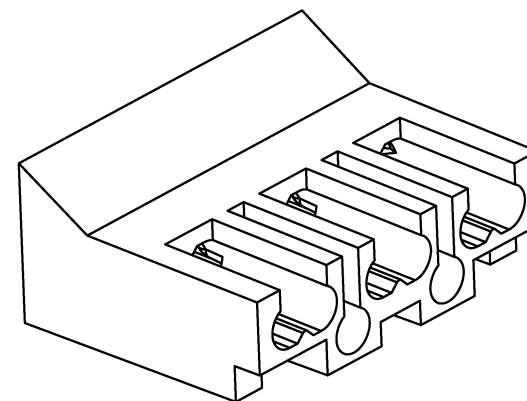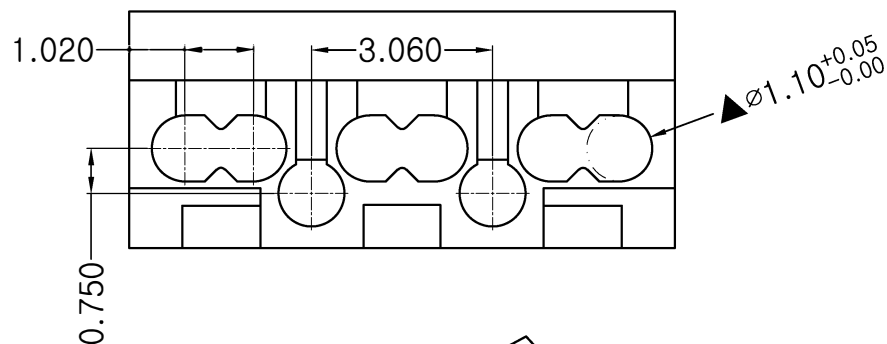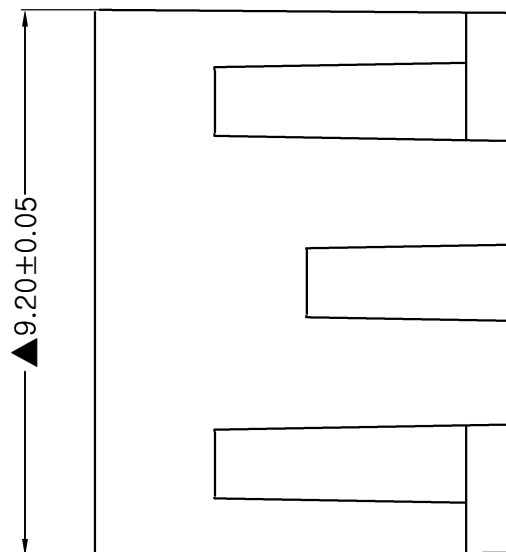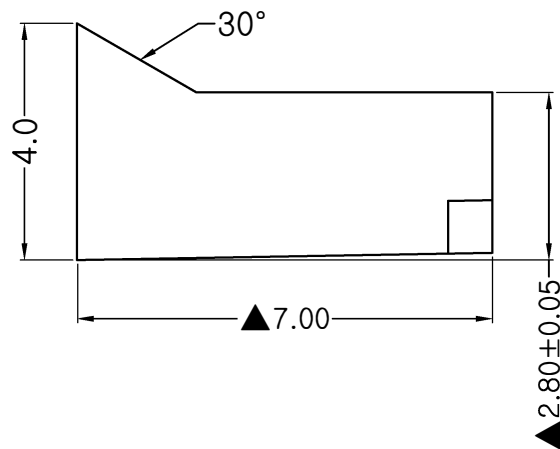

REMARK:
KEY CONTROL DIMENSIONS MARKED "▲"
IN THE DRAWING.

Wavenet, Inc.

PRODUCT NO	30*0462**		DESCRIPTION	6UP 2DOWN Load Bar $\phi 1.10$			SHEET	1/1	
MATERIAL	PC	UNIT	mm	SCALE	NULL	DWG NO	LB04008	EDITI	A/0
DIMENSIONAL TOLERANCE X. X ± 0.2 X. XX ± 0.10 X. XXX ± 0.05 ANGLE $\pm 2^\circ$			THIRD ANGLE PROJECTION 			DRAWN	JING_LI	DATE	2017. 05. 05
						CHECK		DATE	
						APPRO.		DATE	