


Control Cable 16AWG 2C Riser (CMR) Unshielded Stranded

Cable Detail

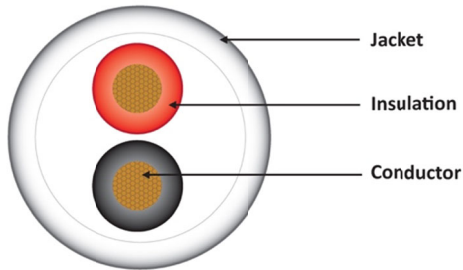

Cable Marking

16 AWG 2C UNSHIELDED CMR FT4 TYPE XXXXXXXX C(ETL)US
****FT

Part Numbers	Jacket Color	Package
CC1602URGY4	Grey	1000ft / Reelex II

Approval



Applicable Standards

- Power-limited control circuits
- Wiring of the following systems: Security / Audio / Background music
- Reference Standard: UL444 / ETL, CL2 / CL2R

Physical Characteristics

Conductor Material		Stranded Bare Copper
AWG		16
Conductor	(mm)	19 / 0.295
Insulation Material		PVC
Average Thickness	(mm)	0.225
Min. Point Thickness	(mm)	0.19
Insulation Dia.	(±0.03mm)	1.9
Assembly Dia.	(±0.2mm)	3.8
Jacket Material		FR-PVC
Average Thickness	(mm)	0.40
Min. Point Thickness	(mm)	0.35
Outer Dia.	(±0.2mm)	4.60
Rip Cord		Yes
Insulation colors		Black / Red
Nominal Weight	1000 ft.	32 lbs.