


CAT 5E 350MHz UTP RISER (CMR) 24/4 UNSHIELDED FT4 CABLE

Cable Detail

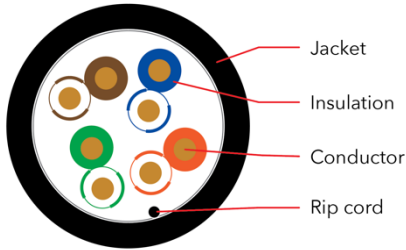

Applicable Standards

- C(ETL) listed FT4 CMR
- C(ETL)US Verified to TIA-568-C.2
- RoHS Compliant



Physical Characteristics

Conductor Material	Solid Bare Copper
Number of Conductors	4
AWG	24 AWG
Stranding	Solid
Insulation Material	HDPE
Overall Diameter	0.035 in. $\pm$ 0.0002 in
Average Thickness	0.0078 in
Jacket Material	Flame Retardant PVC
Average Wall Thickness	0.019 in.
Nominal Outer Diameter	0.200 in. $\pm$ 0.008 in.
Nominal Weight	20 lbs.
Shielding (Y/N)	No
Ripcord (Y/N)	Yes
Separator (Y/N)	No

Mechanical Characteristics

Temperature Range	Installation	0°C to + 75°C
	Operating	-20°C to + 75°C
Tensile Strength	Before	$\geq$ 13.8 Mpa
Elongation	Aging	$\geq$ 100%
Aging Condition		100°C x 168 hours
	After	$\geq$ 85% of unaged
	Aging	$\geq$ 50% of unaged

Insulation Colors

Pair 1	White / Blue	Blue
Pair 2	White / Orange	Orange
Pair 3	White / Green	Green
Pair 4	White / Brown	Brown

Part Numbers	Jacket Color	Package
5E04URXX4	Black, Blue, Purple, Grey, Green, Red, White, Yellow	1000FT / Reelex II
5E04URXX5	Black, Blue, Purple, Grey, Green, Red, White, Yellow	1000FT / Reelex II N

Electrical Characteristics

DC Resistance	9.38 Ω / 100m Max. @ 20°C
Resistance Unbalanced	5% Max. @ 20°C
Capacitance Unbalance	330 pF / 100m Max. @ 20°C
Mutual Capacitance	5.6 nF / 100m Max. @ 20°C
Delay Skew	45 nS / 100m Max. @ 20°C
Nominal Velocity of Propagation (NVP)	68%

Electrical Performance

Frequency (MHz)	Attenuation (dB/100m)		Return loss (dB)		NEXT (dB)		PS-NEXT (dB)	
	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.
0.772	1.8	1.5	23.0	33.0	72.0	81.1	70.0	78.7
1	2.0	1.8	23.0	38.6	70.3	79.4	68.3	76.9
4	4.1	3.6	23.0	39.8	61.2	69.9	59.3	67.4
8	5.8	5.1	24.5	38.2	56.8	61.9	54.8	59.4
10	6.5	5.8	25.0	38.0	55.3	62.4	53.5	59.9
16	8.2	7.4	25.0	37.4	52.3	57.8	50.3	55.2
20	9.3	8.2	25.0	36.8	50.8	56.4	48.8	53.8
25	10.4	9.3	24.3	35.2	49.3	56.3	47.3	53.6
31.25	11.7	10.5	23.6	33.3	47.9	53.8	45.9	51.1
62.5	17.0	14.9	21.5	32.2	43.4	49.8	41.4	47.4
100	22.0	19.2	20.1	31.3	40.3	47.5	38.3	45.0
155	28.1	24.2	18.8	29.8	37.4	45.1	35.4	42.6
200	32.4	27.3	18.0	28.5	35.7	43.3	33.7	40.2
250	38.9	30.9	17.5	27.3	34.8	41.4	32.5	39.0
300	41.0	34.1	16.8	25.6	33.1	40.2	31.1	37.7
350	44.9	37.8	16.3	23.2	32.1	39.0	30.1	36.5
Frequency (MHz)	ELFEXT (dB/100m)		PS-ELFEXT (dB)		ACR Typ (dB)		PS-ACR Typ (dB)	
	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.
0.772	66.0	73.3	63.0	72.7	70.2	79.2	68.2	77.0
1	63.8	71.3	60.8	70.6	68.2	77.6	66.3	75.0
4	51.7	59.4	48.7	58.7	57.2	66.3	55.2	63.5
8	45.7	53.2	42.7	51.1	51.0	59.8	49.0	56.9
10	43.8	50.5	40.8	49.7	48.8	56.6	47.0	53.7
16	39.7	47.0	36.7	45.1	43.0	53.0	42.1	47.4
20	37.7	45.0	34.7	43.6	41.5	50.5	39.5	45.0
25	35.8	43.3	32.8	42.0	38.9	47.0	36.9	43.7
31.25	33.9	41.3	30.9	40.5	36.5	43.3	34.2	40.0
62.5	27.8	35.8	24.8	34.5	26.4	35.0	24.4	31.2
100	23.8	31.3	20.8	30.3	18.3	26.2	16.3	24.2
155	19.9	27.5	16.9	26.9	10.0	20.9	7.3	15.9
200	17.7	24.7	14.7	24.5	5.0	16.0	2.0	10.0
250	17.1	22.2	14.0	22.5	0.0	10.6	-	4.0
300	16.7	20.5	13.5	20.7	-	6.1	-	-1.3
350	16.0	19.4	12.8	19.6	-	1.2	-	-6.4

* Values above 100MHz are information only.

Cable Marking

XXXXXX CATEGORY 5E 350MHZ 24AWG 4PR UTP CMR 75C FT4
C(ETL)US VERIFIED (ETL) ANSI/TIA-568-C.2 *****FT

