



Cable ID: CAT6A HDJ SERIES U/UTP CABLING SYSTEM PL


Date / Time: 10/14/2021 04:27:09 PM
Headroom 8.9 dB (NEXT 36-45) Test
Limit: TIA Cat 6A Perm. Link Cable
Type: Cat 6A U/UTP
NVP: 68.2%

Operator: Sam Hen
Software Version: V6.6 Build 2
Limits Version: V7.6
Calibration Date:
Main (Module): 09/30/2021
Remote (Module): 09/30/2021


Test Summary: PASS

Model: DSX-5000
Main S/N: 3658026
Remote S/N: 3658040
Main Adapter: DSX-PLA004
Remote Adapter: DSX-PLA004

Length (ft), Limit 295	[Pair 12]	299
Prop. Delay (ns), Limit 498	[Pair 36]	470
Delay Skew (ns), Limit 44	[Pair 36]	25
Resistance (ohms)	[Pair 36]	12.69
Insertion Loss Margin (dB)	[Pair 45]	1.3
Frequency (MHz)	[Pair 45]	500.0
Limit (dB)	[Pair 45]	43.8





Wire Map (T568B)


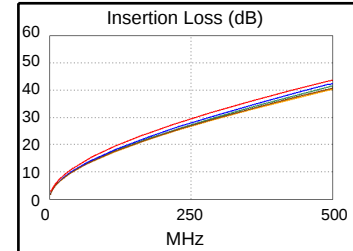


Worst Case Margin Worst Case Value



PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45	36-78	36-45	36-78
NEXT (dB)	8.9	8.5	8.9	9.9
Freq. (MHz)	498.0	249.5	498.0	496.0
Limit (dB)	26.7	35.4	26.7	26.8
Worst Pair	36	36	36	36
PS NEXT (dB)	8.7	9.5	8.7	9.5
Freq. (MHz)	499.0	496.0	499.0	496.0
Limit (dB)	23.8	23.9	23.8	23.9

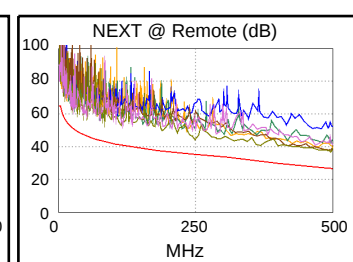



PASS	MAIN	SR	MAIN	SR
Worst Pair	12-36	12-36	78-36	78-36
ACR-F (dB)	14.7	14.8	16.2	16.1
Freq. (MHz)	44.3	197.5	416.0	418.0
Limit (dB)	31.3	18.3	11.8	11.8
Worst Pair	36	36	36	36
PS ACR-F (dB)	14.0	14.2	15.5	15.7
Freq. (MHz)	1.0	1.6	404.0	399.0
Limit (dB)	61.2	57.0	9.1	9.2

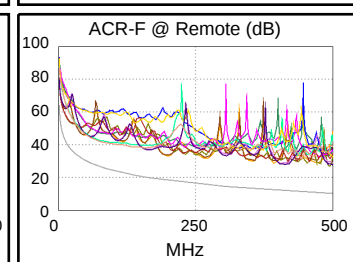

N/A	MAIN	SR	MAIN	SR
Worst Pair	36-45	36-78	36-45	36-45
ACR-N (dB)	9.2	11.1	9.3	12.2
Freq. (MHz)	498.0	249.5	499.0	500.0
Limit (dB)	-16.9	5.9	-17.0	-17.1
Worst Pair	36	36	36	36
PS ACR-N (dB)	10.7	11.7	10.9	11.7
Freq. (MHz)	497.0	496.0	499.0	496.0
Limit (dB)	-19.7	-19.7	-19.9	-19.7

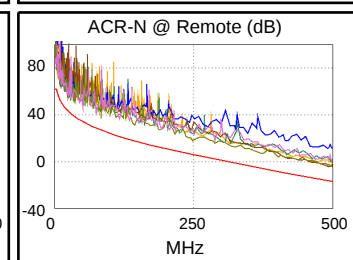

PASS	MAIN	SR	MAIN	SR
Worst Pair	36	36	36	36
RL (dB)	6.1	6.4	7.7	6.4
Freq. (MHz)	4.5	495.0	458.0	495.0
Limit (dB)	21.0	8.0	8.0	8.0

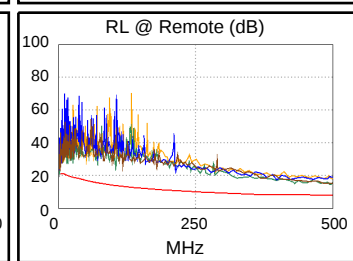

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	10GBASE-T	ATM-25
ATM-51	ATM-155	100VG-AnyLan
TR-4	TR-16 Active	TR-16 Passive



Cable ID: CAT6A SDJ SERIES U/UTP CABLING SYSTEM PL


Date / Time: 10/14/2021 04:28:19 PM
Headroom 8.9 dB (NEXT 36-45) Test
Limit: TIA Cat 6A Perm. Link Cable
Type: Cat 6A U/UTP
NVP: 68.2%

Operator: Sam Hen
Software Version: V6.6 Build 2
Limits Version: V7.6
Calibration Date:
Main (Module): 09/30/2021
Remote (Module): 09/30/2021


Test Summary: PASS

Model: DSX-5000
Main S/N: 3658026
Remote S/N: 3658040
Main Adapter: DSX-PLA004
Remote Adapter: DSX-PLA004


Length (ft), Limit 295	[Pair 12]	299
Prop. Delay (ns), Limit 498	[Pair 36]	470
Delay Skew (ns), Limit 44	[Pair 36]	25
Resistance (ohms)	[Pair 36]	12.72
Insertion Loss Margin (dB)	[Pair 45]	1.3
Frequency (MHz)	[Pair 45]	500.0
Limit (dB)	[Pair 45]	43.8



Wire Map (T568B)



Insertion Loss (dB)

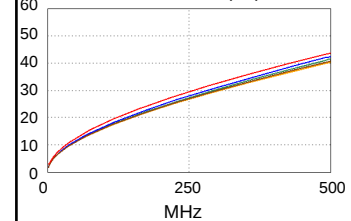

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45	36-78	36-45	36-78
NEXT (dB)	8.9	8.5	8.9	9.9
Freq. (MHz)	498.0	249.5	498.0	496.0
Limit (dB)	26.7	35.4	26.7	26.8
Worst Pair	36	36	36	36
PS NEXT (dB)	8.7	9.5	8.7	9.5
Freq. (MHz)	499.0	496.0	499.0	496.0
Limit (dB)	23.8	23.9	23.8	23.9









PASS	MAIN	SR	MAIN	SR
Worst Pair	12-36	12-36	78-36	78-36
ACR-F (dB)	14.7	14.8	16.3	16.1
Freq. (MHz)	43.8	199.0	416.0	418.0
Limit (dB)	31.4	18.2	11.8	11.8
Worst Pair	36	36	36	36
PS ACR-F (dB)	13.9	14.1	15.7	15.7
Freq. (MHz)	1.1	1.3	405.0	399.0
Limit (dB)	60.2	59.3	9.0	9.2

N/A	MAIN	SR	MAIN	SR
Worst Pair	36-45	36-78	36-45	36-45
ACR-N (dB)	9.2	11.1	9.3	12.2
Freq. (MHz)	498.0	249.5	499.0	500.0
Limit (dB)	-16.9	5.9	-17.0	-17.1
Worst Pair	36	36	36	36
PS ACR-N (dB)	10.8	11.7	10.9	11.7
Freq. (MHz)	498.0	496.0	499.0	496.0
Limit (dB)	-19.8	-19.7	-19.9	-19.7

PASS	MAIN	SR	MAIN	SR
Worst Pair	36	36	36	36
RL (dB)	6.2	6.4	7.7	6.4
Freq. (MHz)	4.5	496.0	458.0	496.0
Limit (dB)	21.0	8.0	8.0	8.0

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	10GBASE-T	ATM-25
ATM-51	ATM-155	100VG-AnyLan
TR-4	TR-16 Active	TR-16 Passive

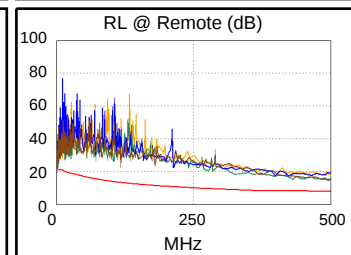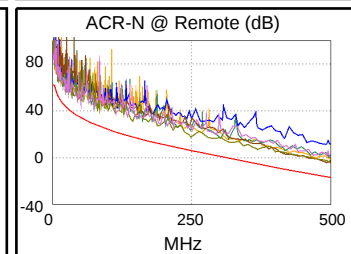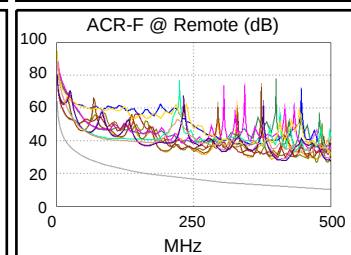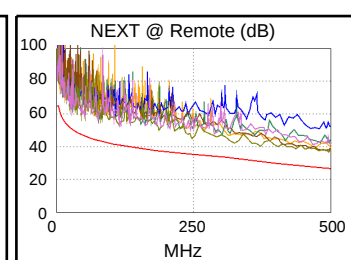



Cable ID: CAT6 HDJ SERIES U/UTP CABLING SYSTEM PL

Date / Time: 10/12/2021 04:26:12 PM

Headroom 7.1 dB (NEXT 36-78) Test

Limit: TIA Cat 6 Perm. Link Cable

Type: Cat 6 U/UTP

NVP: 69.0%

Operator: Sam Hen

Software Version: V6.6 Build 2

Limits Version: V7.6

Calibration Date:

Main (Module): 09/30/2021

Remote (Module): 09/30/2021

Test Summary: PASS

Model: DSX-5000


Main S/N: 3658026

Remote S/N: 3658040

Main Adapter: DSX-PLA004

Remote Adapter: DSX-PLA004

Length (ft), Limit 295	[Pair 78]	293
Prop. Delay (ns), Limit 498	[Pair 45]	454
Delay Skew (ns), Limit 44	[Pair 45]	22
Resistance (ohms)	[Pair 45]	13.84
Insertion Loss Margin (dB)	[Pair 45]	2.3
Frequency (MHz)	[Pair 45]	250.0
Limit (dB)	[Pair 45]	31.1




Wire Map (T568B)

PASS



Insertion Loss (dB)

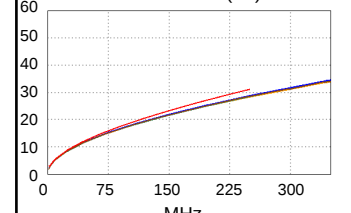

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	36-78	12-45	36-78	12-45
NEXT (dB)	7.1	10.2	7.5	11.4
Freq. (MHz)	247.0	89.8	247.0	245.5
Limit (dB)	35.4	42.6	35.4	35.5
Worst Pair	36	45	36	36
PS NEXT (dB)	6.5	10.6	6.5	10.8
Freq. (MHz)	247.0	245.0	247.0	249.5
Limit (dB)	32.8	32.9	32.8	32.7









PASS	MAIN	SR	MAIN	SR
Worst Pair	78-12	12-78	78-12	12-78
ACR-F (dB)	15.4	15.2	15.4	15.2
Freq. (MHz)	250.0	250.0	250.0	250.0
Limit (dB)	16.2	16.2	16.2	16.2
Worst Pair	45	45	12	78
PS ACR-F (dB)	16.0	16.1	16.6	17.2
Freq. (MHz)	1.3	1.1	250.0	250.0
Limit (dB)	59.3	60.2	13.2	13.2

N/A	MAIN	SR	MAIN	SR
Worst Pair	36-78	12-45	36-78	12-45
ACR-N (dB)	6.9	10.9	7.7	13.7
Freq. (MHz)	149.0	89.8	247.0	245.5
Limit (dB)	15.9	25.1	4.5	4.7
Worst Pair	36	45	36	45
PS ACR-N (dB)	9.0	12.2	9.2	12.9
Freq. (MHz)	160.0	44.8	247.0	245.0
Limit (dB)	11.8	33.0	1.9	2.1

PASS	MAIN	SR	MAIN	SR
Worst Pair	12	78	12	36
RL (dB)	8.0	8.0	9.8	14.8
Freq. (MHz)	3.9	3.9	86.5	199.0
Limit (dB)	21.0	21.0	14.6	11.0

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
ATM-25	ATM-51	ATM-155
100VG-AnyLan	TR-4	TR-16 Active
TR-16 Passive		

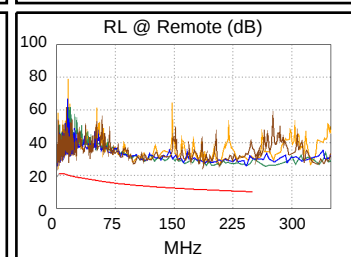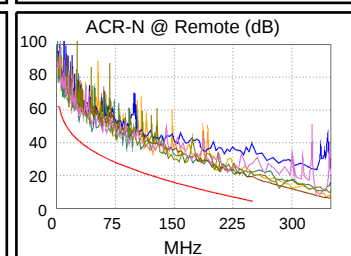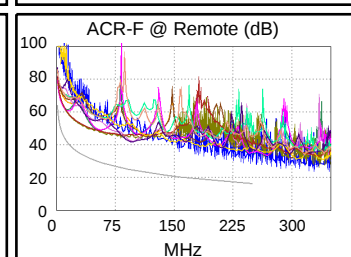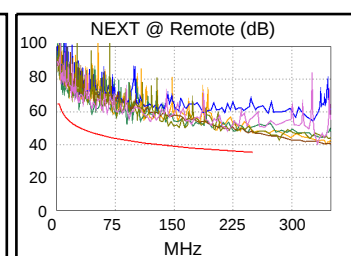



Cable ID: CAT6 SDJ SERIES U/UTP CABLING SYSTEM PL

Date / Time: 10/12/2021 04:23:58 PM

Headroom 7.5 dB (NEXT 36-78) Test

Limit: TIA Cat 6 Perm. Link Cable

Type: Cat 6 U/UTP

NVP: 69.0%

Operator: Sam Hen

Software Version: V6.6 Build 2

Limits Version: V7.6

Calibration Date:

Main (Module): 09/30/2021

Remote (Module): 09/30/2021

Test Summary: PASS

Model: DSX-5000


Main S/N: 3658026

Remote S/N: 3658040

Main Adapter: DSX-PLA004

Remote Adapter: DSX-PLA004

Length (ft), Limit 295	[Pair 78]	293
Prop. Delay (ns), Limit 498	[Pair 45]	454
Delay Skew (ns), Limit 44	[Pair 45]	22
Resistance (ohms)	[Pair 45]	13.76
Insertion Loss Margin (dB)	[Pair 45]	2.3
Frequency (MHz)	[Pair 45]	250.0
Limit (dB)	[Pair 45]	31.1




Wire Map (T568B)

PASS



Insertion Loss (dB)

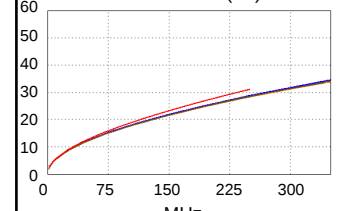

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	36-78	12-45	36-78	12-45
NEXT (dB)	7.5	10.2	7.8	11.4
Freq. (MHz)	234.5	89.8	247.0	245.5
Limit (dB)	35.8	42.6	35.4	35.5
Worst Pair	36	45	36	36
PS NEXT (dB)	6.5	10.5	6.5	10.7
Freq. (MHz)	247.0	245.0	247.0	249.5
Limit (dB)	32.8	32.9	32.8	32.7

PASS	MAIN	SR	MAIN	SR
Worst Pair	12-78	78-12	12-78	36-45
ACR-F (dB)	15.3	15.6	15.3	15.9
Freq. (MHz)	235.5	235.5	235.5	248.5
Limit (dB)	16.7	16.7	16.7	16.3
Worst Pair	45	45	12	45
PS ACR-F (dB)	16.1	16.0	17.0	16.6
Freq. (MHz)	1.3	1.0	247.0	248.5
Limit (dB)	59.3	61.2	13.3	13.3









N/A	MAIN	SR	MAIN	SR
Worst Pair	36-78	12-45	36-78	12-45
ACR-N (dB)	7.0	10.9	7.9	13.7
Freq. (MHz)	159.5	89.8	247.0	245.5
Limit (dB)	14.5	25.1	4.5	4.7
Worst Pair	36	45	36	45
PS ACR-N (dB)	9.0	12.2	9.2	12.8
Freq. (MHz)	234.5	44.8	247.0	245.0
Limit (dB)	3.2	33.0	1.9	2.1

PASS	MAIN	SR	MAIN	SR
Worst Pair	12	78	12	36
RL (dB)	7.7	8.0	9.6	14.7
Freq. (MHz)	3.9	3.9	86.8	199.0
Limit (dB)	21.0	21.0	14.6	11.0

Compliant Network Standards:

10BASE-T 100BASE-TX
1000BASE-T 2.5GBASE-T
ATM-25 ATM-51
100VG-AnyLan TR-4
TR-16 Passive

100BASE-T4
5GBASE-T
ATM-155
TR-16 Active

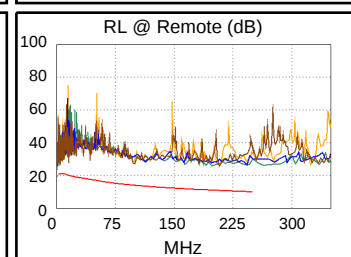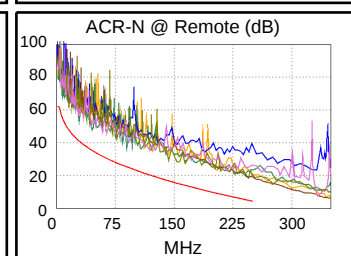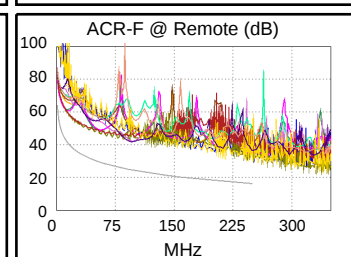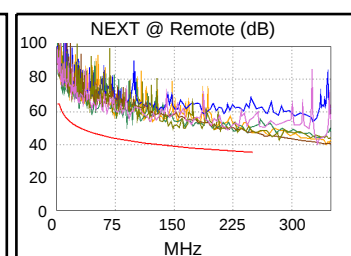



Cable ID: CAT5E HDJ SERIES U/UTP CABLING SYSTEM PL

Date / Time: 10/08/2021 01:47:06

PM Headroom 8.5 dB (NEXT 36-78)

Test Limit: TIA Cat 5e Perm. Link

Cable Type: Cat 5e U/UTP

NVP: 69.0%

Operator: Sam Hen

Software Version: V6.6 Build 2

Limits Version: V7.6

Calibration Date:

Main (Module): 09/30/2021

Remote (Module): 09/30/2021

Test Summary: PASS

Model: DSX-5000


Main S/N: 3658026

Remote S/N: 3658040

Main Adapter: DSX-PLA004

Remote Adapter: DSX-PLA004

Length (ft), Limit 295	[Pair 78]	295
Prop. Delay (ns), Limit 498	[Pair 45]	453
Delay Skew (ns), Limit 44	[Pair 45]	18
Resistance (ohms)	[Pair 45]	16.86
Insertion Loss Margin (dB)	[Pair 36]	1.9
Frequency (MHz)	[Pair 36]	100.0
Limit (dB)	[Pair 36]	21.0




Wire Map (T568B)

PASS





Insertion Loss (dB)


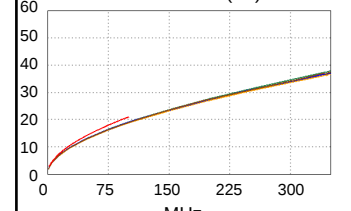


Worst Case Margin Worst Case Value



PASS	MAIN	SR	MAIN	SR
Worst Pair	36-78	36-78	36-78	36-78
NEXT (dB)	8.5	7.4	8.3	8.5
Freq. (MHz)	95.3	72.3	95.3	99.0
Limit (dB)	32.7	34.6	32.7	32.4
Worst Pair	36	36	36	36
PS NEXT (dB)	8.7	8.0	10.2	8.0
Freq. (MHz)	23.8	99.0	95.8	99.0
Limit (dB)	39.5	29.4	29.6	29.4

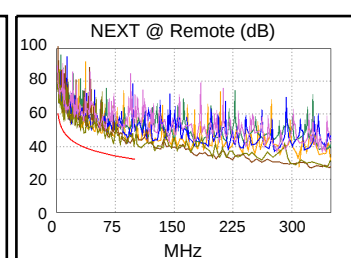



PASS	MAIN	SR	MAIN	SR
Worst Pair	12-36	12-36	12-36	12-36
ACR-F (dB)	12.6	12.8	12.9	13.1
Freq. (MHz)	92.8	93.3	99.8	100.0
Limit (dB)	19.3	19.2	18.6	18.6
Worst Pair	36	36	36	36
PS ACR-F (dB)	12.4	12.5	13.4	13.6
Freq. (MHz)	1.5	1.5	99.8	100.0
Limit (dB)	52.1	52.1	15.6	15.6

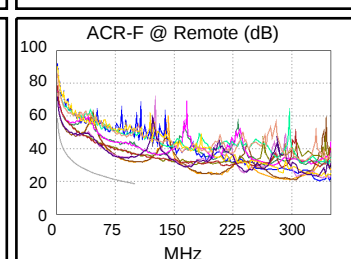

N/A	MAIN	SR	MAIN	SR
Worst Pair	36-78	36-78	36-78	36-78
ACR-N (dB)	9.2	8.9	10.4	10.6
Freq. (MHz)	9.0	9.1	95.3	99.0
Limit (dB)	43.3	43.2	12.2	11.5
Worst Pair	36	36	36	36
PS ACR-N (dB)	9.1	8.6	12.4	9.9
Freq. (MHz)	9.0	9.0	98.3	99.0
Limit (dB)	40.3	40.3	8.7	8.5

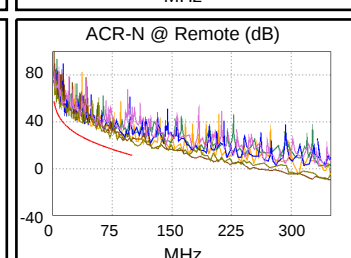

PASS	MAIN	SR	MAIN	SR
Worst Pair	45	12	12	78
RL (dB)	10.2	8.6	11.7	11.7
Freq. (MHz)	3.5	3.6	92.0	89.3
Limit (dB)	19.0	19.0	12.4	12.5

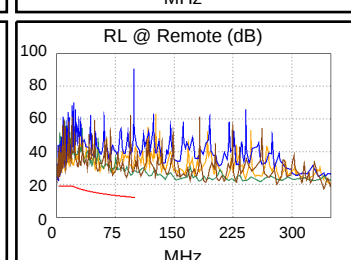

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
ATM-25	ATM-51	ATM-155
100VG-AnyLan	TR-4	TR-16 Active
TR-16 Passive		



Cable ID: CAT5E SDJ SERIES U/UTP CABLING SYSTEM PL

Date / Time: 10/08/2021 01:41:06 PM

Headroom 8.6 dB (NEXT 36-78)

Test Limit: TIA Cat 5e Perm. Link

Cable Type: Cat 5e U/UTP

NVP: 69.0%

Operator: Sam Hen

Software Version: V6.6 Build 2

Limits Version: V7.6

Calibration Date:

Main (Module): 09/30/2021

Remote (Module): 09/30/2021

Test Summary: PASS

Model: DSX-5000


Main S/N: 3658026

Remote S/N: 3658040

Main Adapter: DSX-PLA004


Remote Adapter: DSX-PLA004

Length (ft), Limit 295	[Pair 78]	295
Prop. Delay (ns), Limit 498	[Pair 45]	453
Delay Skew (ns), Limit 44	[Pair 45]	18
Resistance (ohms)	[Pair 45]	16.79
Insertion Loss Margin (dB)	[Pair 36]	1.9
Frequency (MHz)	[Pair 36]	100.0
Limit (dB)	[Pair 36]	21.0





Wire Map (T568B)

PASS


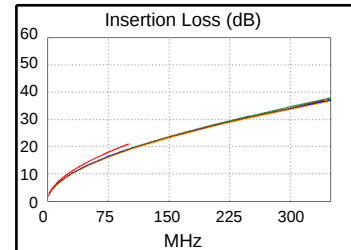


Worst Case Margin Worst Case Value



PASS	MAIN	SR	MAIN	SR
Worst Pair	36-78	36-78	36-78	36-78
NEXT (dB)	8.6	6.5	8.3	7.5
Freq. (MHz)	95.3	72.3	95.3	99.0
Limit (dB)	32.7	34.6	32.7	32.4
Worst Pair	36	36	36	36
PS NEXT (dB)	8.5	7.8	10.0	7.8
Freq. (MHz)	23.8	99.0	98.3	99.0
Limit (dB)	39.5	29.4	29.4	29.4

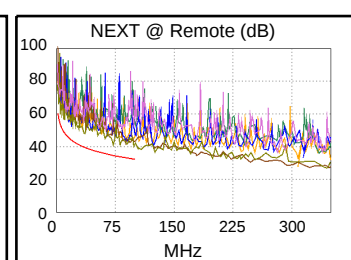



PASS	MAIN	SR	MAIN	SR
Worst Pair	12-36	12-36	12-36	12-36
ACR-F (dB)	12.9	13.1	13.3	13.5
Freq. (MHz)	92.8	92.8	99.8	100.0
Limit (dB)	19.3	19.3	18.6	18.6
Worst Pair	36	36	36	36
PS ACR-F (dB)	12.6	12.6	13.7	13.7
Freq. (MHz)	1.5	1.4	100.0	100.0
Limit (dB)	52.1	52.8	15.6	15.6

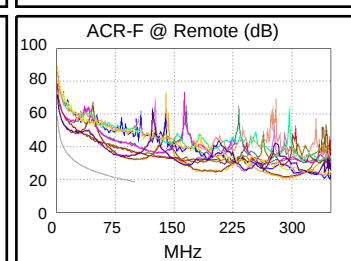

N/A	MAIN	SR	MAIN	SR
Worst Pair	36-78	36-78	36-78	36-78
ACR-N (dB)	9.0	8.0	10.4	9.6
Freq. (MHz)	9.0	9.1	95.3	99.0
Limit (dB)	43.3	43.2	12.2	11.5
Worst Pair	36	36	36	36
PS ACR-N (dB)	9.1	8.4	11.8	9.7
Freq. (MHz)	9.0	9.0	98.3	99.0
Limit (dB)	40.3	40.3	8.7	8.5

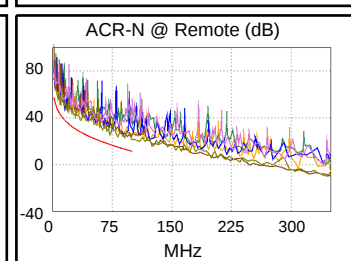

PASS	MAIN	SR	MAIN	SR
Worst Pair	12	12	12	78
RL (dB)	10.0	8.7	10.0	12.0
Freq. (MHz)	91.8	3.6	91.8	89.3
Limit (dB)	12.4	19.0	12.4	12.5

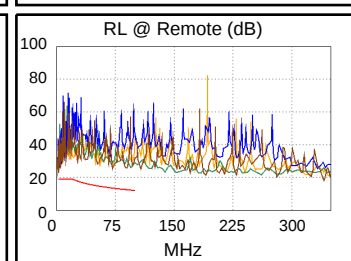

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
ATM-25	ATM-51	ATM-155
100VG-AnyLan	TR-4	TR-16 Active
TR-16 Passive		



Cable ID: CAT5E DIRECT BURIAL WB/OSP PL

Date / Time: 11/05/2021 10:52:10 AM

Headroom 9.7 dB (NEXT 36-78)

Test Limit: TIA Cat 5e Perm. Link

Cable Type: Cat 5e U/UTP

NVP: 69.0%

Operator: Sam Hen

Software Version: V6.6 Build 2

Limits Version: V7.6

Calibration Date:

Main (Module): 09/30/2021

Remote (Module): 09/30/2021

Test Summary: PASS

Model: DSX-5000


Main S/N: 3658026

Remote S/N: 3658040

Main Adapter: DSX-PLA004

Remote Adapter: DSX-PLA004

Length (ft), Limit 295	[Pair 78]	288
Prop. Delay (ns), Limit 498	[Pair 36]	441
Delay Skew (ns), Limit 44	[Pair 36]	17
Resistance (ohms)	[Pair 45]	17.47
Insertion Loss Margin (dB)	[Pair 36]	2.7
Frequency (MHz)	[Pair 36]	100.0
Limit (dB)	[Pair 36]	21.0




Wire Map (T568B)

PASS





Insertion Loss (dB)


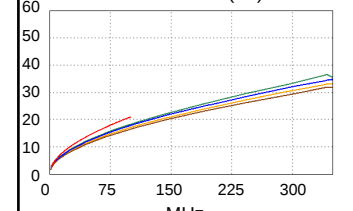


Worst Case Margin Worst Case Value



PASS	MAIN	SR	MAIN	SR
Worst Pair	36-78	12-36	36-78	12-45
NEXT (dB)	9.7	10.2	11.0	14.0
Freq. (MHz)	83.8	6.3	100.0	100.0
Limit (dB)	33.6	51.7	32.3	32.3
Worst Pair	36	36	36	45
PS NEXT (dB)	10.1	11.6	11.3	13.9
Freq. (MHz)	84.0	10.4	100.0	100.0
Limit (dB)	30.5	45.2	29.3	29.3

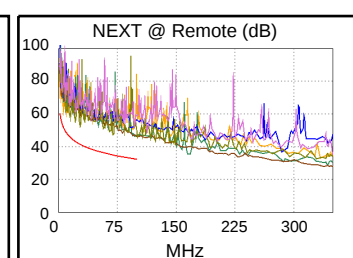



PASS	MAIN	SR	MAIN	SR
Worst Pair	12-36	12-36	12-36	12-36
ACR-F (dB)	8.6	8.9	8.7	9.0
Freq. (MHz)	99.3	98.0	100.0	100.0
Limit (dB)	18.7	18.8	18.6	18.6
Worst Pair	36	36	36	36
PS ACR-F (dB)	10.9	11.0	11.0	11.4
Freq. (MHz)	99.3	1.9	100.0	99.8
Limit (dB)	15.7	50.2	15.6	15.6

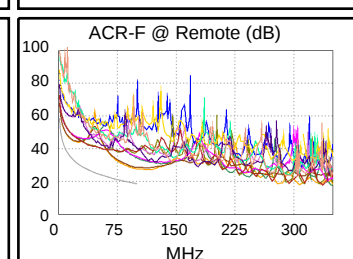

N/A	MAIN	SR	MAIN	SR
Worst Pair	12-36	12-36	36-45	12-45
ACR-N (dB)	10.9	10.6	15.0	17.2
Freq. (MHz)	10.5	6.3	100.0	100.0
Limit (dB)	41.8	46.9	11.3	11.3
Worst Pair	36	36	36	45
PS ACR-N (dB)	12.1	12.2	14.0	17.1
Freq. (MHz)	10.5	10.4	100.0	100.0
Limit (dB)	38.8	38.9	8.3	8.3

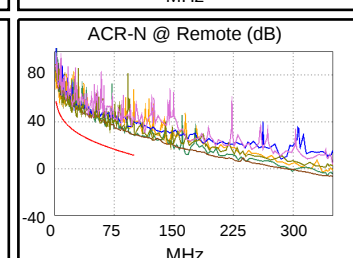

PASS	MAIN	SR	MAIN	SR
Worst Pair	78	78	78	78
RL (dB)	1.2*	0.9*	6.2	0.9
Freq. (MHz)	4.0	5.3	82.5	5.3
Limit (dB)	19.0	19.0	12.8	19.0

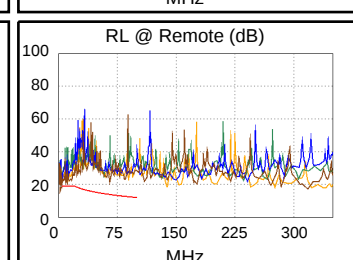

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
ATM-25	ATM-51	ATM-155
100VG-AnyLan	TR-4	TR-16 Active
TR-16 Passive		

* Measurement is within the accuracy limits of the instrument.