


PRODUCT INFORMATION SHEET

UNIVERSAL RADIUS BEND LADDER

The universal radius bend ladder can be used to change vertical cable runs to a horizontal direction or vice versa. Functions as both an inside bend and an outside bend. Designed to conform with minimum cable bend radius requirements

1. Sides made of 1-1/2 x 3/8 x .06 wall tubular steel
2. Rungs made of 1 x 1/2 x .06 wall tubular steel
3. Components are RoHS compliant
4. Conforms to EIA-310 Standard
5. Easy installation using butt-splice kit
6. Available in black and white finishes (custom colors available through special order)
7. Available in 12" and 18" wide
8. 6", 9", 15", and 24" wide available through special order

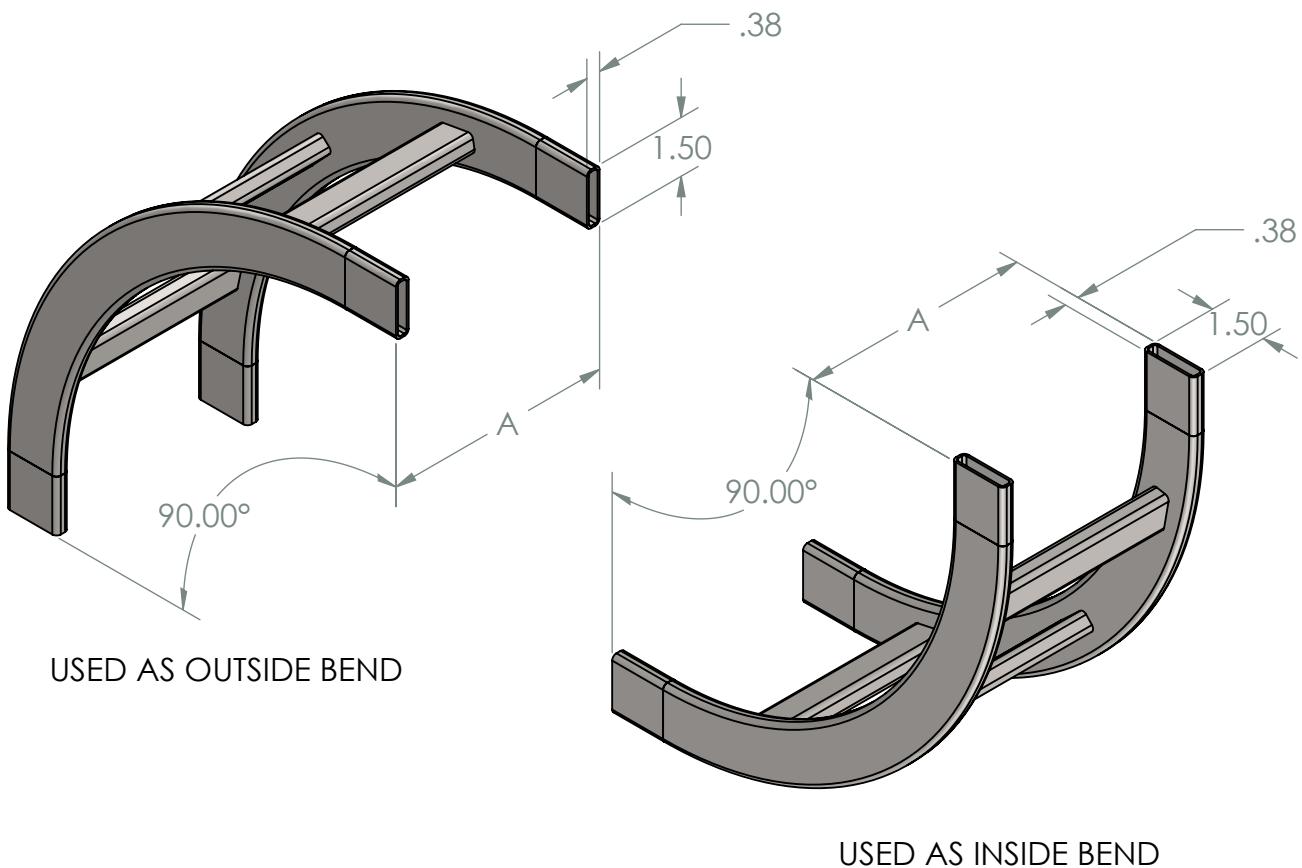

Part Number
WL-IR9012-BK