


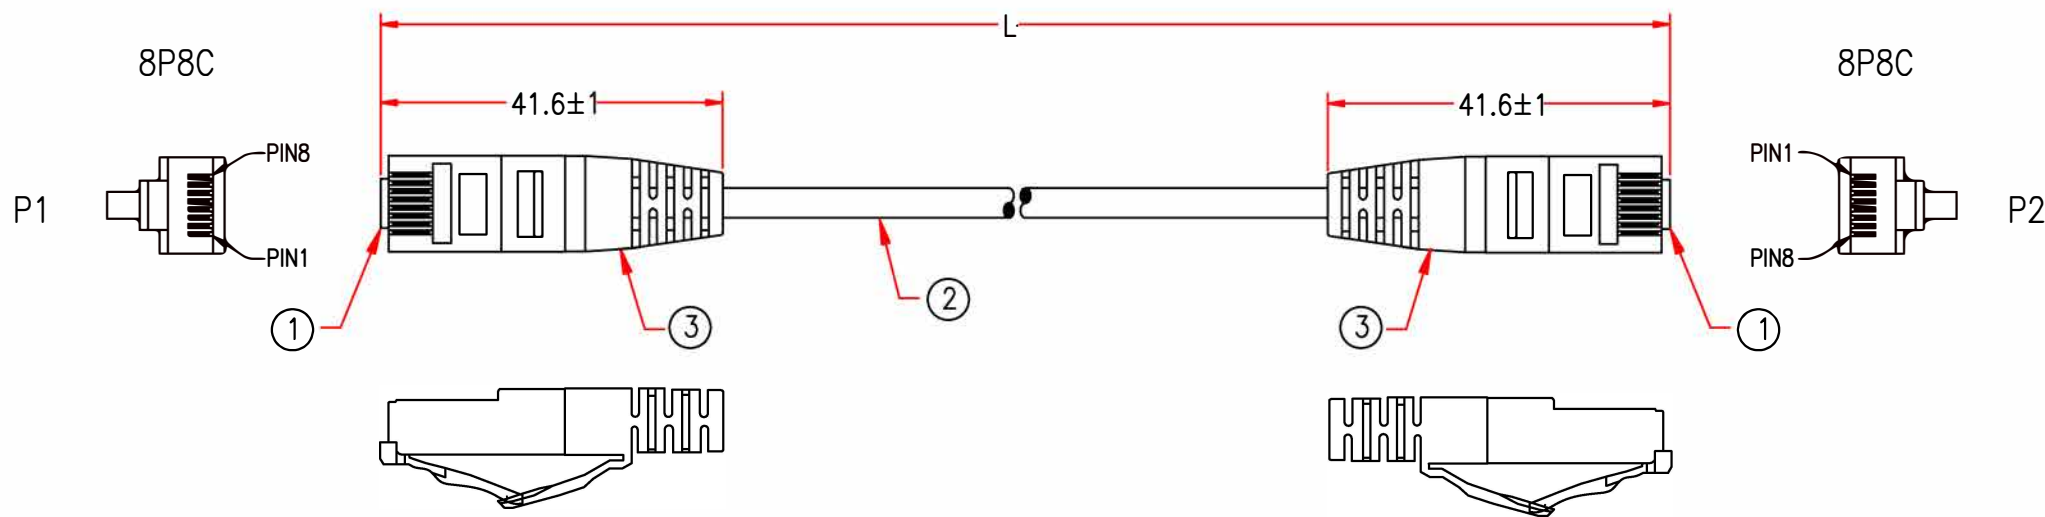

8233-35			
P1		P2	
1		1	WHITE/ORANGE
2		2	ORANGE
3		3	WHITE/GREEN
6		6	GREEN
4		4	BLUE
5		5	WHITE/BLUE
7		7	WHITE/BROWN
8		8	BROWN

MARKING:
(UL) EXXXXXX TYPE CM 28AWG 75°C C(UL)
CM 28AWG 75°C ETL VERIFIED ANSI/TIA-568.2-D
MINI UTP CAT.6 RoHS COMPLIANCE MSL-VN- BATCH NO.

*NOTE: All relevant materials are complied with RoHS directive .

	3	8P8C TRANSPARENT BOOT(OD4.5mm)	A4FK36-0209	2	M209
	2	4 TWISD PAIRS MINI CAT.6 28AWG UTP, OD 3.6mm, JACKET BLUE(UH-4), DRAWING No.EU002804P-643	H5AJ33-0304U07	L+10mm	M304
	1	8P8C MODULAR PLUG, GOLD PLATING 50u" ON CONTACTS, NO P8-063-11	A1NC36-0209	2	M209
No.		DESCRIPTION		Q'TY	Supplier
APPROVED		 707 E. Sepulveda Blvd., Carson, CA 90745 Toll Free: 888.492.8363 www.wavenetcable.com			
CHECKED	SH				
DESIGNER	SH				
DRAWING	SH				
DATE	10/MAR/23	ITEM NO.	6E04UMSLIMXX-PC-XX		UNIT:mm

Cable Length Unless Other Spec.
Tolerances:
0 ~200mm ±10mm
201~1000mm ±20mm
1001 ~1500mm ±25mm
1501~2100mm ±30mm
2100mm↑ ±40mm

	REV.9 2023.3.10	MODIFY MARKING			
	REV.7 2021.03.11	MODIFY MARKING			REV.8 2021.08.20
	REV.5 2019.07.02	MODIFY MARKING			REV.6 2019.10.21
	REV.3 2016.04.28	MODIFY MARKING			REV.4 2018.11.20
	REV.1 2015.12.08	MODIFY PLUG			REV.2 2015.12.17
		ADD MARKING	CHECKED		